


Mia2

Basin Mixer All Pressure

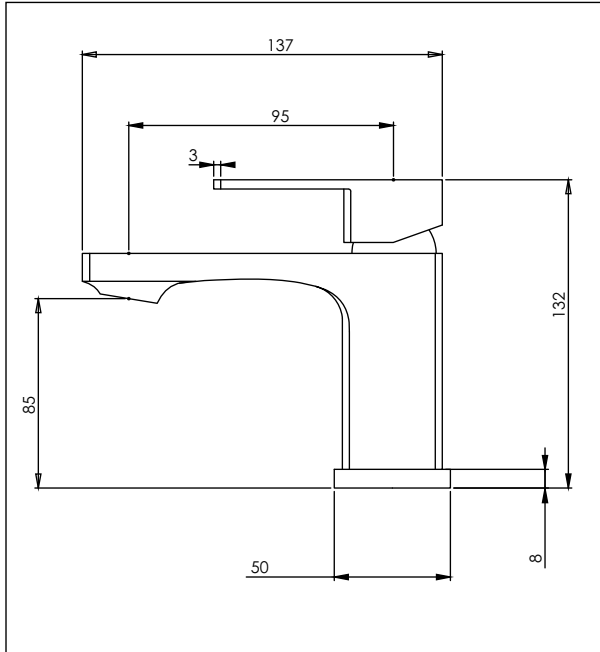

Code: MI2 BASMAP | MI2 BASMAP BLK | MI2 BASMAP GM | MI2 BASMAP BN

Finish: Chrome | Black | Gunmetal | Brushed Nickel

Spout: Fixed

Water Outlet: M24 cache Aerator with PCA supplied

Stainless Steel Inlet Hoses:

Hot: Size: M12 x 1/2" BSP
Length: 400mm

Cold: Size: M12 x 1/2" BSP
Length: 400mm

Base plate supplied with custom flat seal

Mounting Hardware: Stud: 1 x 8mm
Nut: 11mm AF
Horseshoe washer

Max Bench Thickness: 40mm

Installation Hole Diameter: Minimum: 28mm
Maximum: 35mm


Cartridge: Kerox 35mm Raised base high O-ring

Flow Control: 7 l/min PCA supplied for regulated flow with mains pressure system

Max hot @ 35kPa = 6.8 l/min

Suitable for low/unequal & mains pressure systems

Recommended Operational Pressure Range: 35 - 600 kPa
Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa



KIWI OWNED COMPANY



Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.
Tel: 09-828 2068,
Fax: 09-828 2069
Email: info@aquatica.co.nz
or visit our website:
www.aquatica.co.nz

© copyright Aquatica 2019