


# Kuchena

## Gooseneck Sink Mixer

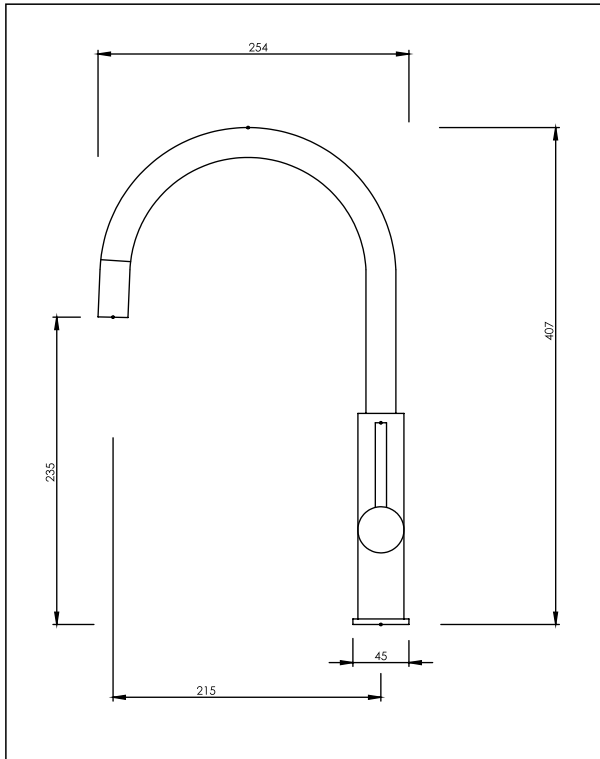

<b>Code:</b> KU SM GNECK CH	KU SM GNECK BLK	KU SM GNECK BN	KU SM GNECK BG	KU SM GNECK OAT	KU SM GNECK CPR
<b>Finish:</b> Chrome	Black	Brushed Nickel	Brushed Gold	Oatmeal	Copper

**Spout:** Cast, Swivel 360°

**Water Outlet:** Cache perlator HC PCA fitted

**Stainless Steel Inlet Hoses:**

Size: M10 x 1/2" BSP

**Installation Hole Diameter:** Minimum: 33mm  
Maximum: 36mm  
Maximum bench thickness: 26mm

**Mounting Hardware:** 32mm brass tube and backnut 35mm A/F

Dress ring supplied with O-ring seal

**Cartridge:** Sedal 25mm flat base

**Flow rate:** 8 l/min PCA Fitted for regulated flow  $\pm$  10% with mains pressure system  
Max. hot @35kPa = 2.0 l/min

KIWI OWNED COMPANY



**Aquatica NZ Limited**

9 Saunders Place,  
Avondale, Auckland.  
Tel: 09-828 2068,  
Fax: 09-828 2069  
Email: info@aquatica.co.nz  
or visit our website:  
[www.aquatica.co.nz](http://www.aquatica.co.nz)

© copyright Aquatica 2019

**Suitable for mains pressure only**  
Recommended Operational Pressure Range: 150 - 600 kPa  
Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa



*Please note: Specifications are subject to change without notice. It is the responsibility of the installer to check the measurements of the physical product before installation*