


Viamo

Sink Mixer Gooseneck

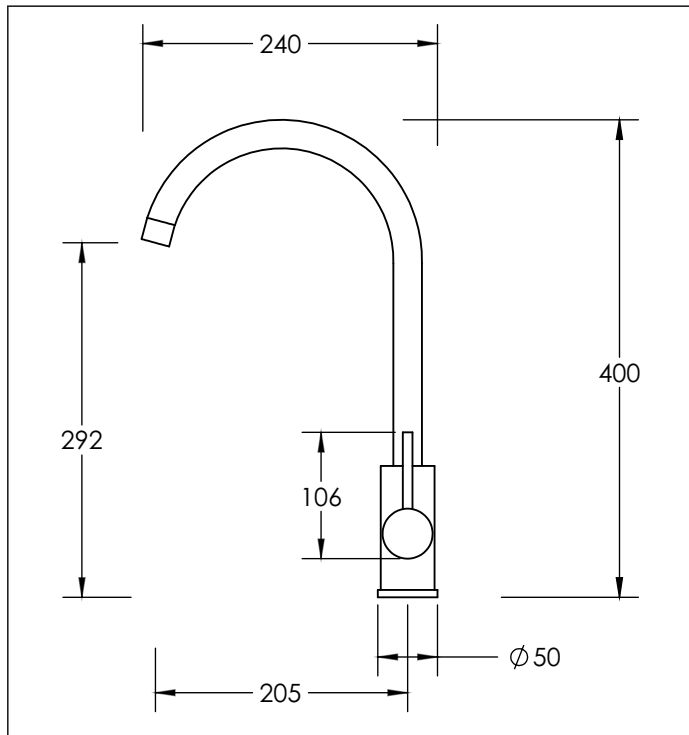

Code: VI SM GNECK SS | VI SM GNECK GM | VI SM GNECK BLK
Finish: Stainless Steel Brushed | Gun Metal | Black

Spout: Swivel 360°

Water Outlet: M24 ring with Aerator

Stainless Steel Inlet Hoses: Cold: Size: M10 x 1/2" BSP
Hot: Size: M12 x 1/2" BSP

Mounting Hardware: 34mm brass tube and backnut with 2x locking screws

Installation Hole Diameter:
Minimum: 34 mm
Maximum: 44mm
Max bench thickness: 40mm

Cartridge: Kerox 35K Flatbase

Flow: 8 l/min PCA supplied for regulated flow with mains pressure system
Max hot @ 35 kPa = 6 l/min

Note: Fitted with 90° Cartridge to ensure full adjustment of handle is available when mounting close to a wall

Note: 2 year warranty on coloured finish

Suitable for low/unequal & mains pressure systems

Recommended Operational Pressure Range: 35 - 600 kPa
Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa



aquatica



KIWI OWNED COMPANY

NZ • DESIGNED
• ASSEMBLED
• TESTED

Aquatica NZ Limited

9 Saunders Place,
Avondale, Auckland.
Tel: 09-828 2068,
Fax: 09-828 2069
Email: info@aquatica.co.nz
or visit our website:
www.aquatica.co.nz

© copyright Aquatica 2019

Please note: Specifications are subject to change without notice. It is the responsibility of the installer to check the measurements of the physical product before installation