


Mia2

Basin Mixer Wall Mounted

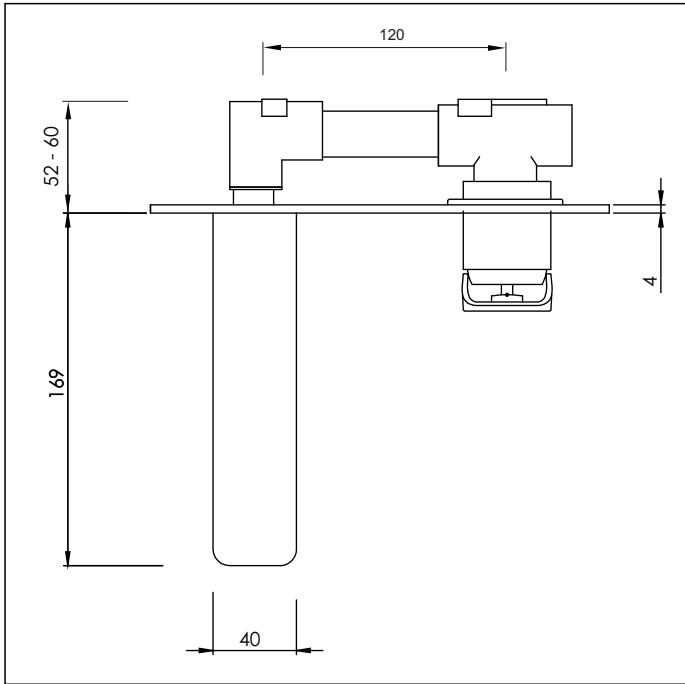

Code: MI2 BASMWM | MI2 BASMWM BLK | MI2 BASMWM BN | MI2 BASMWM BG | MI2 BASMWM GM
Finish: Chrome | Black | Brushed Nickel | Brushed Gold | Gun Metal

Spout: Fixed, Side profile thickness = 14mm and 28mm

Reach of Spout: 154mm

Length: 169mm

Faceplate Dimensions: 200mm (length) x 80mm (width) x 4mm (thickness)

Backset: Minimum: 52mm
Maximum: 60mm

Water Inlets: 1/2" BSP female. Right hand side = cold. Below Mixer = Hot

Water Outlet: M24 Cache Aerator

Installation Hole Size: 55mm (H) x 170mm (W)

Cartridge: SP CART35 K

Flow Control: 7 l/min PCA fitted for regulated flow with mains pressure system

Max Hot @ 35kPa = 8.0 l/min

Suitable for mains pressure only

Recommended Operational Pressure Range: 150 - 600 kPa
Maximum Operating Temp: 80°C Never to Exceed: 1000 kPa



aquatica



AQUATICA NZ LTD.

ASSEMBLING & TESTING IN
NEW ZEALAND SINCE 1999

AUCKLAND

9 Saunders Place, Avondale
PO Box 19146, Avondale
Auckland 1746
Email: info@aquatica.co.nz
Telephone: 09-828 2068

CHRISTCHURCH

11 Brisbane Street,
Christchurch 8062
Telephone: 03-3846245



For our full list of
available products
visit our website
@www.aquatica.co.nz
or scan the QR code.

© copyright Aquatica 2024